

## 10K Tandem Dual Gooseneck


<b>G.V.W.R</b>	25,500#	<b>AXLE</b>	(2) 10000# w/ Electric Brakes
<b>G.A.W.R. (Ea. Axle)</b>	10,000#	<b>SUSPENSION</b>	Multi-Leaf Spring w/ Equalizer
<b>COUPLER</b>	2 5/16" Ball Coupler 30,000#	<b>TIRE</b>	ST235/80R16 E 10 Ply
<b>SAFETY CHAINS</b>	25,000# 3/8" X 35" w/ Clevis Slip Hook	<b>WHEEL</b>	16 x 6; Steel 8 Bolt, dual wheels
<b>JACK</b>	12,000# bolt-on 13.5" Lift Drop Leg Spring Loaded front Pull Pin	<b>FLOOR</b>	2x8 Spruce Kiln Dried dimensional lumber
<b>NECK</b>	Engineered Built p Beam Web: 90 Ksi High strength steel Flanges: 4" x 0.375" steel bar	<b>LIGHTS</b>	L.E.D. D.O.T. Stop, Tail, Turn & Clearance
<b>MAIN FRAME RAILS</b>	Engineered Built Up Main Beam Web: 90 Ksi High strength steel Flanges: 4" x 0.375" steel bar	<b>ELEC. PLUG</b>	Cold Weather 7 Wire RV Plug
<b>CROSSMEMBERS</b>	S3.0" X 2.9 LBS High Tensile Super Lite Beam: 16" Centers	<b>FINISH (PREP)</b>	Steel is cleaned with steel shot blast system to ensure a professional finish.
<b>SIDE RAIL</b>	5" x 2" HSS Tubing 2" x 0.375" rub rail, Stake pockets and chain spools, 24" spacing	<b>FINISH</b>	Superior PPG Paint with a Two Way Hardener is Applied for a Highly Decorative and Protective Finish.

## STANDARD FEATURES

- 97.25" Working Deck
- 102" Overall Width
- Stake Pockets, Rub Rails, & Chain Tabs
- Plank Deck
- Spring Assist Steel Full Width Max Ramps
- Low Profile Bed, Pierced-Beam Frame
- 25,000 #Bolt-on Safety Chains & Hooks
- Super Light Beam Crossmembers
- Deck 12,000# Bolt-On 13.5" Lift Drop Leg Spring Loaded Front Pin
- Dual Wheels
- Breakaway Kit
- Protected Wiring
- LED Lighting Package
- Lockable Front Toolbox
- Lippert Brand Axles
- Radial Tires
- Engineered One Piece Continuous Weld Gooseneck
- Engineered Robotically Welded Continuous Main Beam
- 3/4" Precambered Deck

## DESCRIPTION

Dimensions			
Length	A	B	C
22' + 6'	264"	212.125"	51.875"
24' + 6'	288"	232.25"	55.75"
26' + 6'	312"	249.625"	62.375"
28' + 6'	336"	264.75"	71.25"
30' + 6'	360"	302.875"	57.125"
32' + 6'	384"	319.157"	64.843"
34' + 6'	408"	336.906"	71.094"

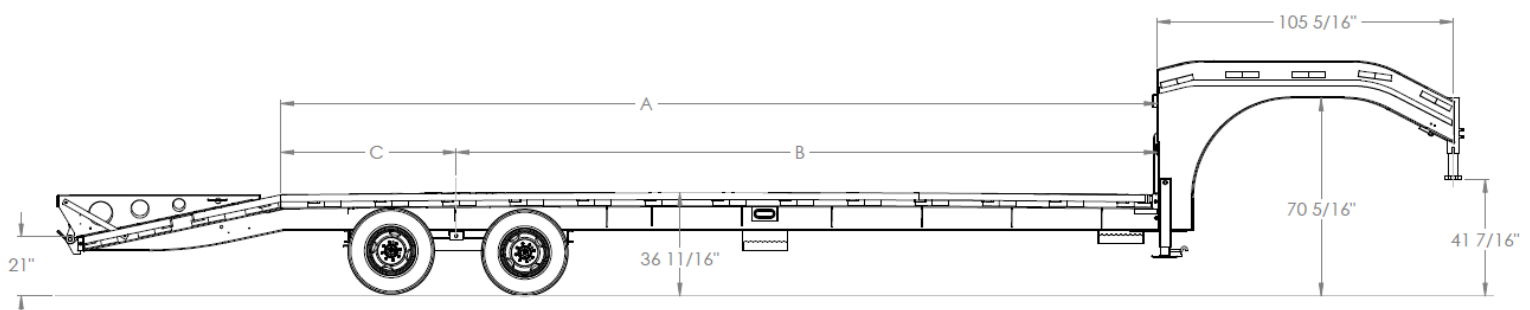



### Standard Parts

Part# 52609 – AXLE 10GD865E-SPR 74.0" X 46.0" US W/ SPRINGS	Part#1332 – LIGHT CLEARANCE RED 0.6875" ROUND LED W/ GROMMET
Part# 2305 – BOX JUNCTION 7 POLE STANDARD PLASTIC AUTO	Part# 2440 – LIGHT LICENSE PLATE SURFACE MOUNT MINI CHROME - LED
Part# 56440 – BREAKAWAY SYSTEM ENGAGER – NO LED	Part# 65823 – LIGHT MID-TURN AMBER 6.5" X 2.25" REFLECTIVE OVAL LED
Part# 63020 – COUPLER GOOSENECK 30000# 2.3125" BALL ROUND STEM INNER & OUTER ASS'Y	Part#57637 – LIGHT STOP TURN TAIL RED 6.5" X 2.25" OVAL LED – 10 DIODE
Part# 2259 – JACK SIDEWIND 12000# WELD-ON 13.5" LIFT DROP LEG SPRING LOADED FRONT PULL PIN	Part#57657 – PLUG AND MOLDED 7 WIRE LEAD 9.0' LONG - COLD WEATHER HD
Part# 1329 – LIGHT CLEARANCE AMBER 0.6875" ROUND LED W/ GROMMET	Part# 61187 – TIRE ASSEMBLY 235/80R16 E 10 PLY 8 HOLE STEEL OEM DUAL

Specs are subject to change without notice. Please contact Southland Trailer Corp Product Specialist for price confirmation on all Royal Cargo Products.  
 Revised January 2020